



ELBA

3500 - 6500

ELBA – The Perfect Combination

The ELBA pump series consists is made up by combining a gearbox and a centrifugal pump.

The ELBA group is utilized for farm lands irrigation, sewage spreading and umbilical systems.


STANDARD FEATURES

- Mechanical seal



VERSIONS

CCW as standard




ELBA 3500 1:4
Splined shaft
1"3/8 - Z6 ISO 500

CCW as standard




ELBA 6500 1:4
Splined shaft
1"3/8 - Z6 ISO 500

CCW as standard



ELBA 3500 1:3
Splined shaft
1"3/8 - Z6 ISO 500

CCW as standard



ELBA 6500 1:3
Splined shaft
1"3/8 - Z6 ISO 500

TECHNICAL DATA

| | centrifugal pump max flow rate | Max rpm | | Head m | Power at max vacuum kW (HP) | Weight kg |
|-----------|--------------------------------|---------|-----|-----------|-----------------------------------|-----------|
| | l/min | 1:3 | 1:4 | | | |
| ELBA 3500 | 3500 | 750 | 540 | 38 | 24 (32,2) | 59 |
| ELBA 6500 | 6500 | 750 | 540 | 70 | 60 (80,4) | 90 |

OPTIONALS




Cutting device





**Heavy duty
bearings**




**Preshaped Ring
Only 3500**



Ø 140 mm scroll
Code 4011101004

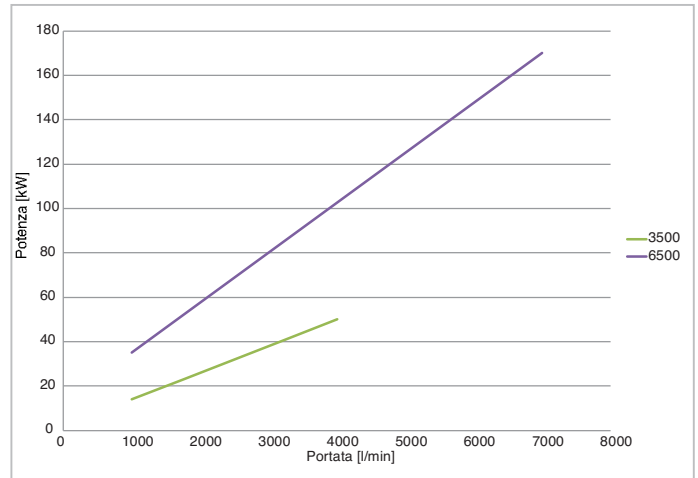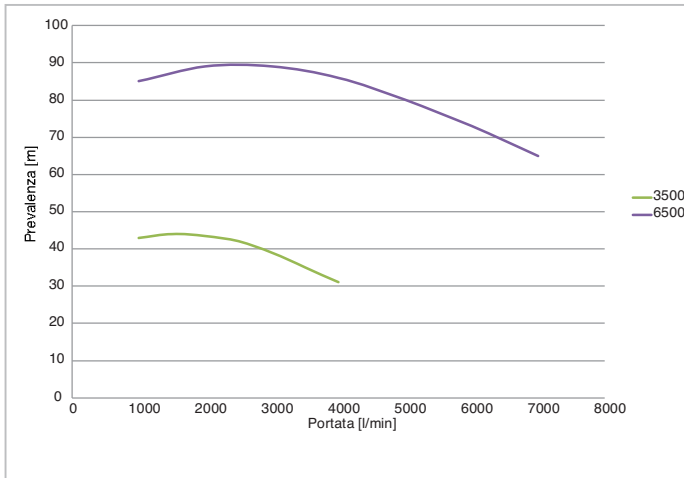


ACCESSORIES

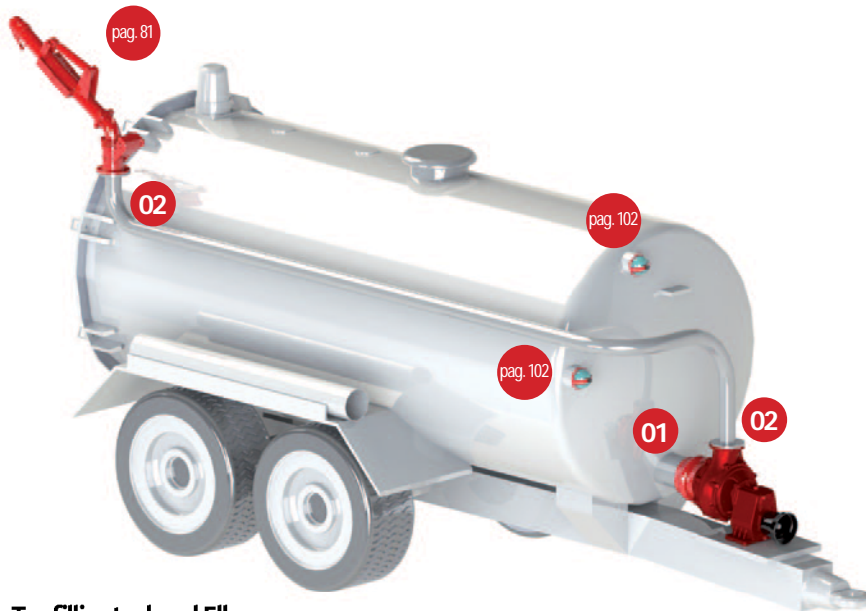

Top filling tank and Elba pump



Rubber coupling joint
pag. 104
 Code 5060010004 - Ø150
 Code 5060010002 - Ø200



Coupling Flange
pag. 88
 Code 5010401009
 GARDA 3500
 Code 5010401008
 GARDA 6500